



ACCELERATOR PEDAL ASSY (1MZ-FE/3MZ-FE) REPLACEMENT

100K3-02

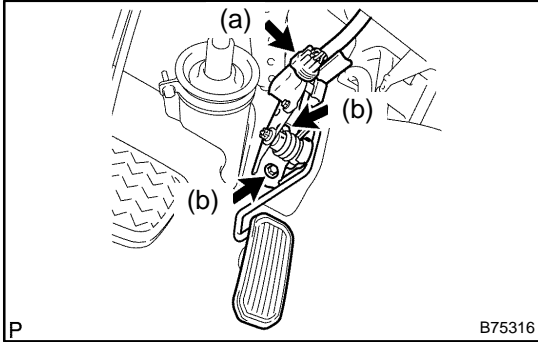

1. REMOVE ACCELERATOR PEDAL ASSY

- (a) Disconnect the accelerator position sensor connector.
- (b) Remove the 2 bolts and the accelerator pedal.

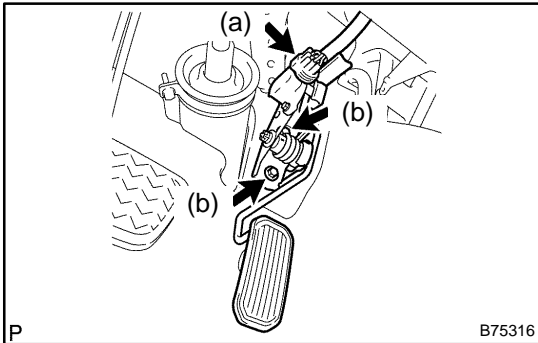

2. INSTALL ACCELERATOR PEDAL ASSY

- (a) Connect the accelerator position sensor connector.
- (b) Install the accelerator pedal with the 2 bolts.

Torque: 7.5 N·m (76 kgf·cm, 66 in·lbf)