


|  |                     |                                |
|--|---------------------|--------------------------------|
| <b>Last Modified:</b> 6-2-2008   | 5.1 G               | <b>From:</b> 200601            |
| <b>Model Year:</b> 2007  | <b>Model:</b> Camry | <b>Doc ID:</b> RM0000022NZ001X |
| <b>Title:</b> 2GR-FE ENGINE CONTROL SYSTEM: CIRCUIT OPENING RELAY: INSPECTION (2007 Camry) |                     |                                |

## INSPECTION

### 1. INSPECT CIRCUIT OPENING RELAY

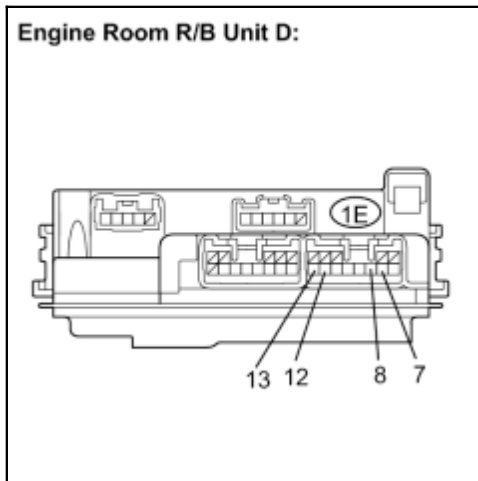

(a) Using an ohmmeter, measure the resistance according to the value(s) in the table below.

Standard resistance:

| TESTER CONNECTION | SPECIFIED CONDITION   |
|-------------------|---|
| 1E-8 - 1E-12      | Below 1 $\Omega$  |
| 1E-7 - 1E-13      | 10 k $\Omega$ or higher   |
| 1E-7 - 1E-13      | Below 1 $\Omega$ (Battery voltage applied between terminals 1E-8 and 1E-12) |

