

Last Modified: 6-2-2008	5.1 A	From: 200601
Model Year: 2007	Model: Camry	Doc ID: RM0000021ZT001X
Title: 2GR-FE ENGINE MECHANICAL: ENGINE ASSEMBLY: REMOVAL (2007 Camry)		

REMOVAL

1. DISCHARGE FUEL SYSTEM PRESSURE

INFO .

2. DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL

3. PLACE FRONT WHEELS FACING STRAIGHT AHEAD

4. REMOVE FRONT WHEELS

5. REMOVE ENGINE UNDER COVER LH

6. REMOVE ENGINE UNDER COVER RH

7. REMOVE FRONT FENDER APRON SEAL RH

8. DRAIN ENGINE OIL

INFO

9. DRAIN ENGINE COOLANT

INFO

10. DRAIN AUTOMATIC TRANSAXLE FLUID

INFO


11. REMOVE WINDSHIELD WIPER LINK ASSEMBLY

INFO .

12. REMOVE COWL TOP PANEL OUTER SUB-ASSEMBLY


INFO

13. REMOVE COOL AIR INTAKE DUCT SEAL

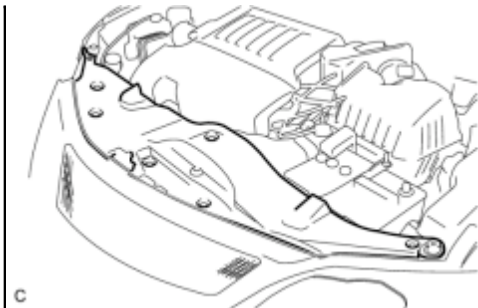

(a) Remove the 7 clips and intake duct seal.

14. REMOVE V-BANK COVER SUB-ASSEMBLY

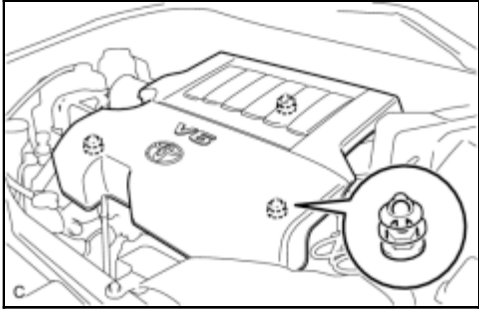

- (a) Hold the front of the V-bank cover and raise it to disengage the 2 clips on the front of the cover. Continue to raise the cover to disengage the clip on the rear of the cover and remove the cover.

Attempting to disengage both front and rear clips at the same time may cause the cover to break.

