


Last Modified: 6-2-2008	5.1 A	From: 200601
Model Year: 2007	Model: Camry	Doc ID: RM0000021ZO001X
Title: 2GR-FE ENGINE MECHANICAL: ENGINE FRONT OIL SEAL: INSTALLATION (2007 Camry)		

INSTALLATION

1. INSTALL TIMING CHAIN CASE OIL SEAL

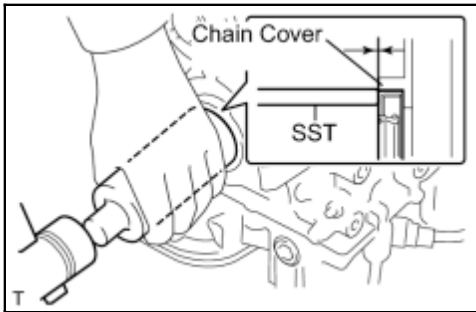

(a) Apply MP grease to a new oil seal lip.

(b) Using SST and a hammer, tap in the oil seal until its surface is flush with the timing chain cover edge.

SST: 09316-60011


09316-00011

NOTICE:

- Keep the lip free of foreign matter.
- Do not tap the oil seal at an angle.

2. INSTALL CRANKSHAFT PULLEY

(a) Align the pulley set key with the key groove of the pulley, and slide on the pulley.

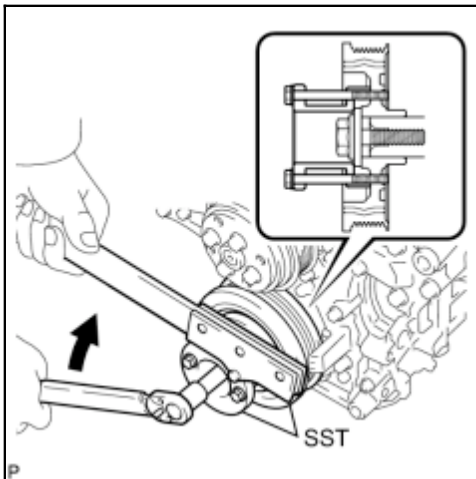

(b) Using SST, install the pulley bolt.

SST: 09213-70011

09213-70020

SST: 09330-00021

Torque: 250 N·m (2,550 kgf·cm, 184 ft·lbf)

3. INSTALL V-RIBBED BELT

INFO

4. INSTALL V-BANK COVER SUB-ASSEMBLY

INFO

5. INSTALL FRONT FENDER APRON SEAL RH

6. INSTALL FRONT WHEEL RH

Torque: 103 N·m (1,050 kgf·cm, 76 ft·lbf)

