


Last Modified: 6-2-2008	5.1 A	From: 200601
Model Year: 2007	Model: Camry	Doc ID: RM0000022NN001X
Title: 2GR-FE ENGINE CONTROL SYSTEM: KNOCK SENSOR: INSTALLATION (2007 Camry)		

INSTALLATION

1. INSTALL KNOCK CONTROL SENSOR

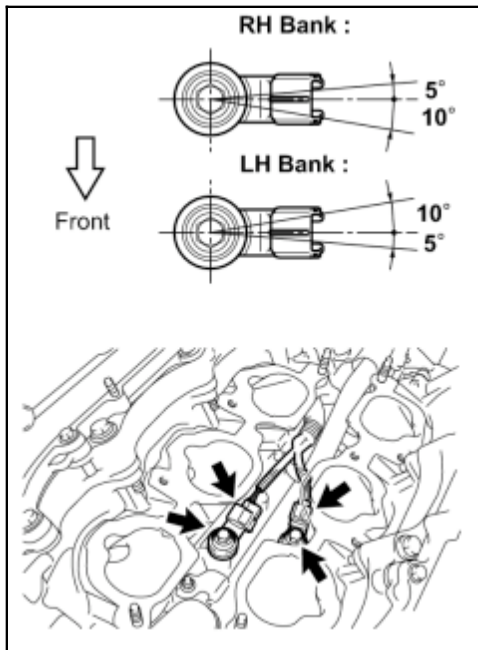

(a) Install the 2 knock control sensors with the 2 bolts as shown in the illustration.

Torque: 20 N·m (204 kgf·cm, 15 ft·lbf)

(b) Connect the 2 knock control sensor connectors.

2. INSTALL INTAKE MANIFOLD [INFO](#)

3. CONNECT FUEL TUBE SUB-ASSEMBLY [INFO](#)

4. INSTALL INTAKE AIR SURGE TANK [INFO](#)

5. INSTALL NO. 1 AIR CLEANER INLET [INFO](#)

6. INSTALL AIR CLEANER CASE SUB-ASSEMBLY [INFO](#)

7. INSTALL AIR CLEANER CAP SUB-ASSEMBLY [INFO](#)

8. INSTALL AIR CLEANER INLET ASSEMBLY [INFO](#)

9. INSTALL V-BANK COVER SUB-ASSEMBLY [INFO](#)

10. INSTALL COOL AIR INTAKE DUCT SEAL

[INFO](#)

11. INSTALL COWL TOP PANEL OUTER SUB-ASSEMBLY

[INFO](#)

12. INSTALL WINDSHIELD WIPER MOTOR AND LINK

[INFO](#)

13. INSTALL COWL TOP VENTILATOR LOUVER SUB-ASSEMBLY

[INFO](#)

14. INSTALL FRONT FENDER TO COWL SIDE SEAL RH

[INFO](#)

15. INSTALL FRONT FENDER TO COWL SIDE SEAL LH

[INFO](#)

16. INSTALL WINDSHIELD WIPER ARM AND BLADE ASSEMBLY LH

[INFO](#)

17. INSTALL WINDSHIELD WIPER ARM AND BLADE ASSEMBLY RH

[INFO](#)

18. ADD ENGINE COOLANT

[INFO](#)

19. CHECK FOR ENGINE COOLANT LEAKS

[INFO](#)

20. CHECK FOR FUEL LEAKS

[INFO](#)

21. INSTALL ENGINE UNDER COVER RH

22. INSTALL ENGINE UNDER COVER LH

